



note:

ensure top of canopy footing is
at least 2'-8" (813mm) below top of slab
or top of island if islands are used.

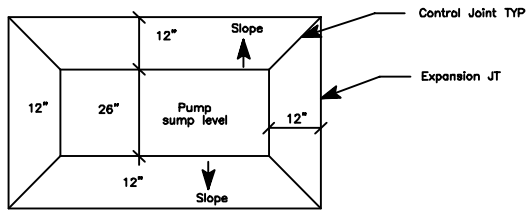

PLAN


Note:
Grade so that there are no
puddles at pump.

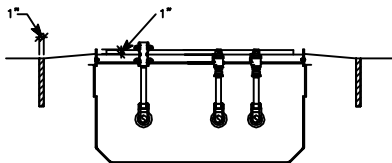

SECTION

See 4/6 For Piping Details
STANDARD At Grade MPD Installation
USE RAISED ISLAND ONLY WHERE REQUIRED.


EITHER MOBIL OR EXXON
BRAND LEGEND LOCATION

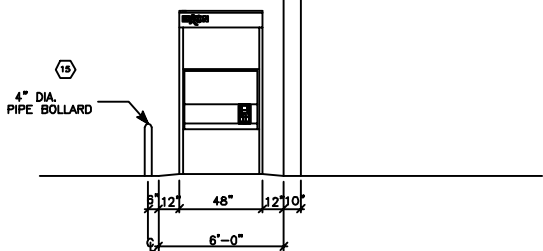

SIDE ELEVATION #1
W/SINGLE MPD AT GRADE

SCALE: 1/4"=1'-0"


EITHER MOBIL OR EXXON
BRAND LEGEND LOCATION

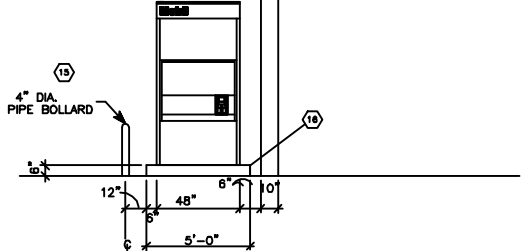

SIDE ELEVATION #1
W/SINGLE MPD ON RAISED ISLAND


SCALE: 1/4"=1'-0"

EITHER MOBIL OR EXXON
BRAND LEGEND LOCATION

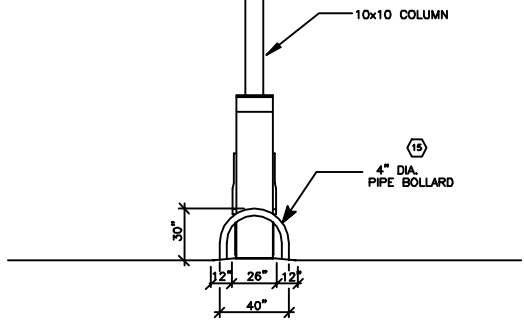

SIDE ELEVATION


SCALE: 1/4"=1'-0"

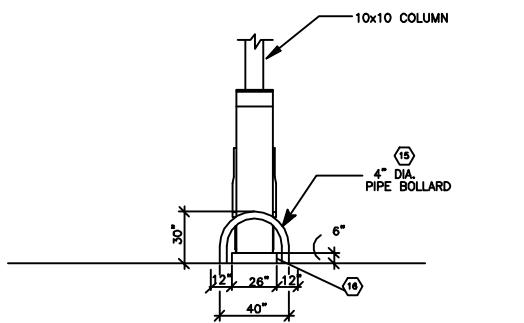

SIDE ELEVATION W/ RAISED ISLAND

SCALE: 1/4"=1'-0"


EITHER MOBIL OR EXXON
BRAND LEGEND LOCATION

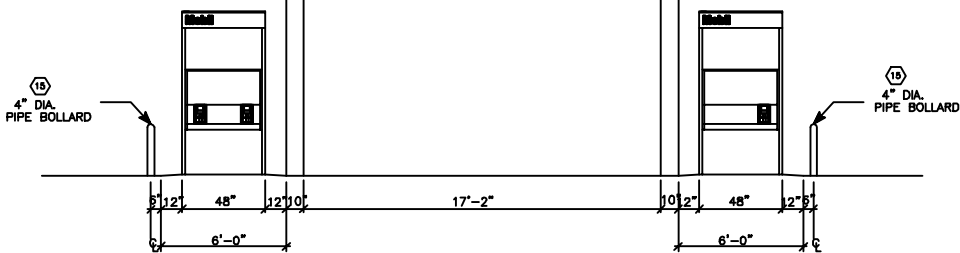

SIDE ELEVATION
42' TANDEM ISLANDS
W/ 1 GAS/DIESEL MPD & 1 GAS MPD AT GRADE

SCALE: 1/4"=1'-0"

EITHER MOBIL OR EXXON
BRAND LEGEND LOCATION

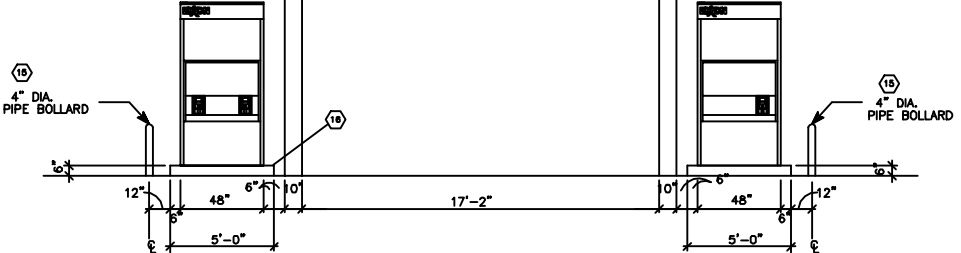

SIDE ELEVATION
42' TANDEM ISLANDS
W/ 1 GAS/DIESEL MPD & 1 GAS MPD ON RAISED ISLAND

SCALE: 1/4"=1'-0"