

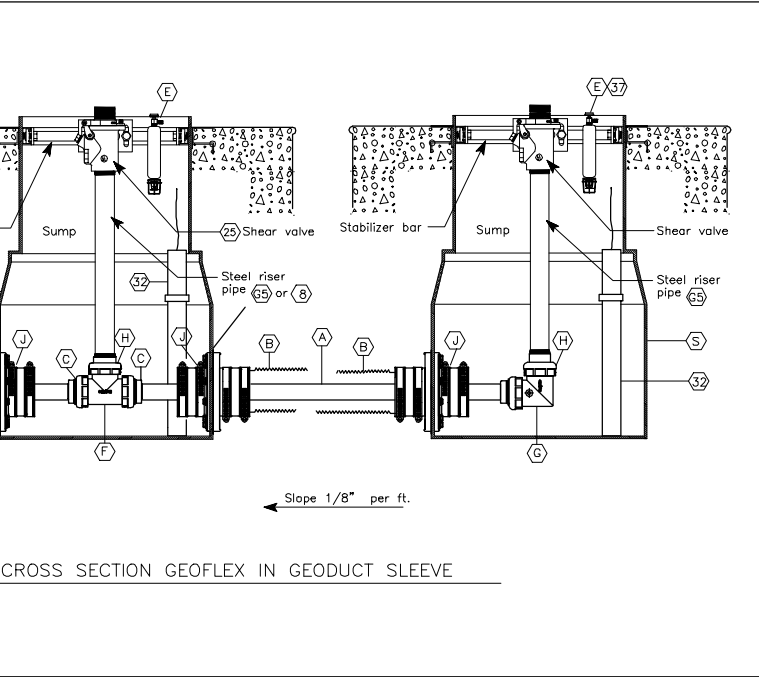
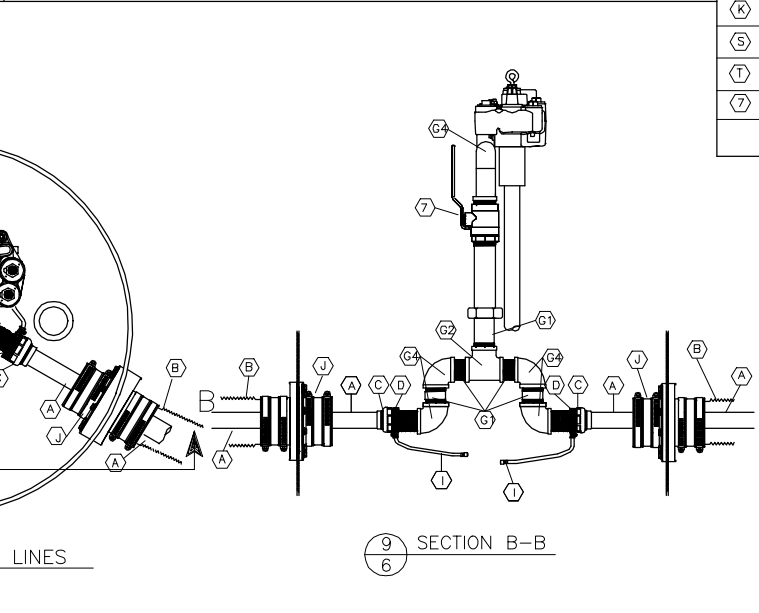
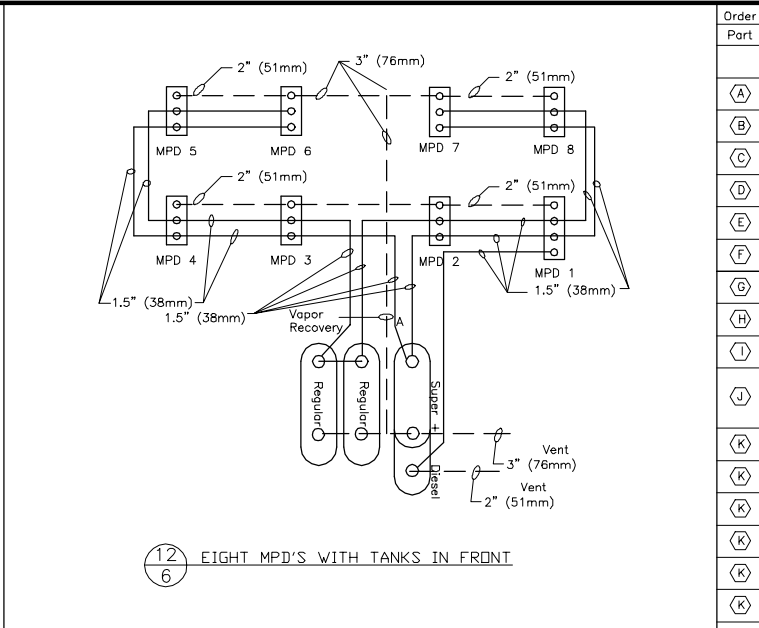
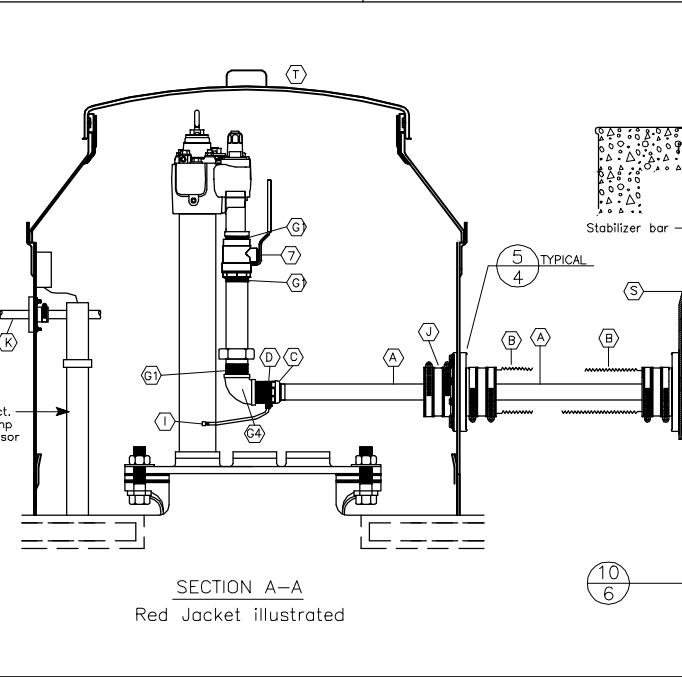
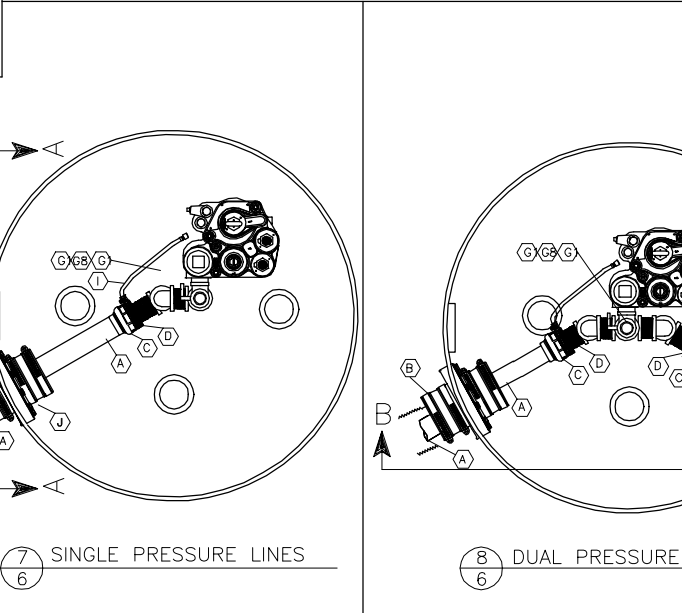
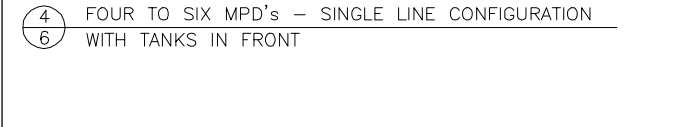
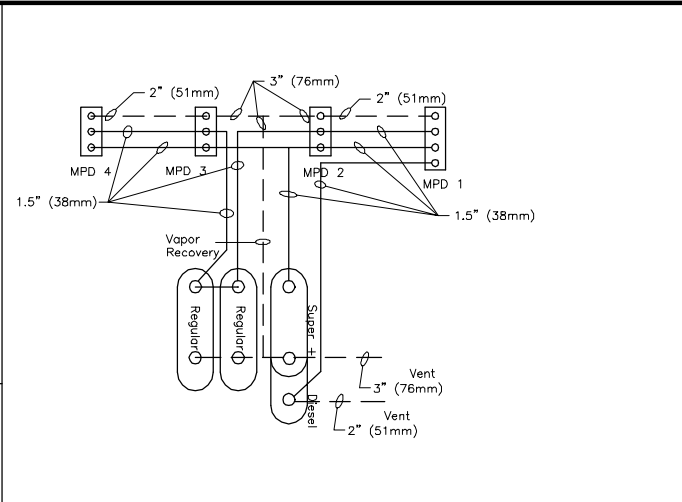
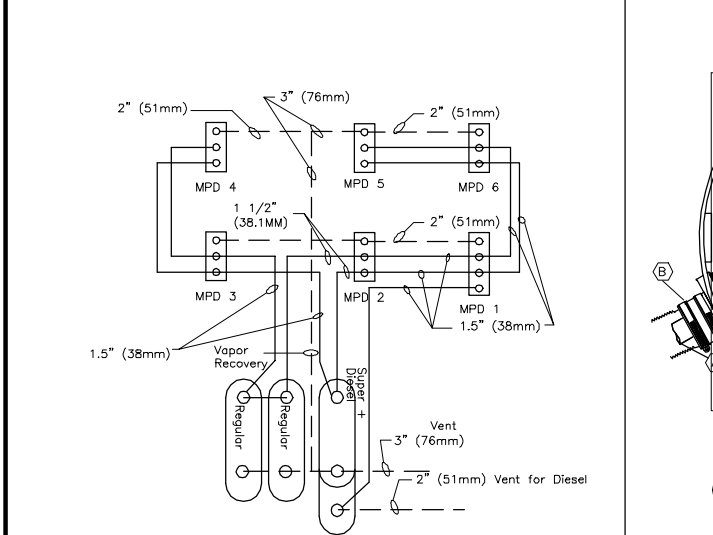
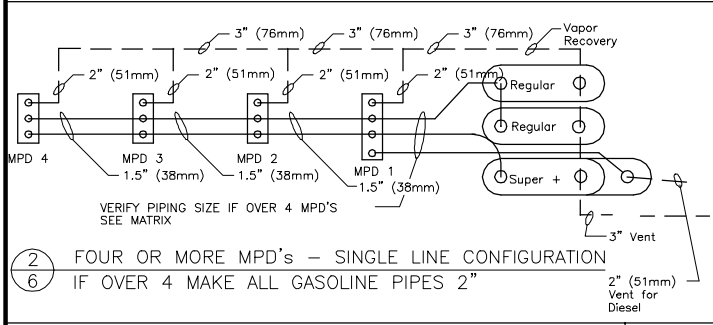
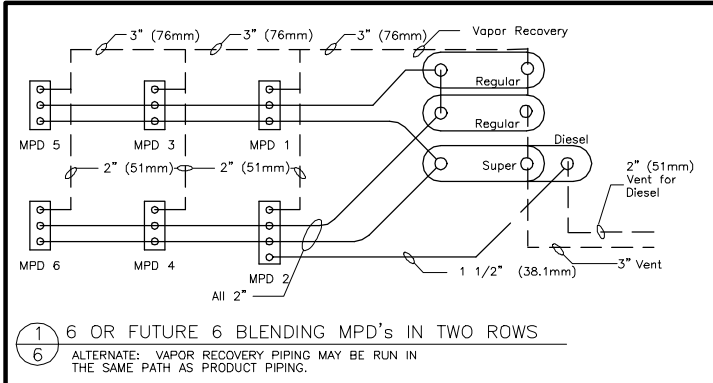


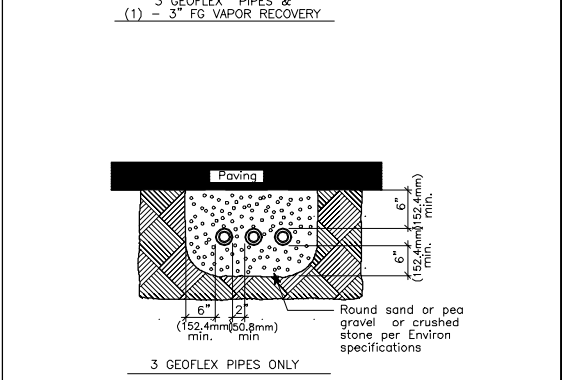

Order from Procurement		Manufacturer's Part Number	
Part	Description	1 1/2" (38.1mm)	2" (50.8mm)
A	Geoflex Pipe	GFP-2150	GFP-2200
B	Geoduct pipe conduit 4" (101.6mm)	GFP-4500	GFP-4500
C	Coax Pipe Coupling	CPC-1502	CPC-2002R
D	Coax Male adaptors - Swivel fit to 2" (50.8mm) NPT	CPA-1520	CPA-2020
E	Fire Extinguisher	AFE-2000	AFE-2000
F	Coax T fitting	CTF-1515	CTF-2020
G	Coax Elbow Fitting	CEF-1515	CEF-2020
H	Coax Riser Adapter	CRA-1515	CRA-2020
I	Coax Test Tube - set of two	CTT-3836	CTT-3836
J	Geoduct Double Entry Boot Donut	DEB-7450 W/RRD-4015D	DEB-7450 W/RRD-4020D
K	Flexible Entry boot - 1/2" (13mm) CONDUIT	DEB-3157	
K	Flexible Entry boot - 3/4" (19mm) CONDUIT		
K	Flexible Entry boot - 1" (25.4mm) CONDUIT		
K	Flexible Entry boot - 2" (50.8mm) PIPE	DEB-6200	
K	Flexible Entry boot - 3" (76.2mm) PIPE	DEB-7630	
K	Flexible Entry boot - 4" (101.6mm) PIPE	DEB-7400	
K	Flexible Entry boot - 6" (152.4mm) PIPE	FEB-8600	
S	Dispenser Sump	Environ Deep sump order for specific dispenser type	
T	Tank Sump	Fluid Containment STE42B	
Z	Ball Valve - 2"	see sheet 2	

G1	Nipple 2" (50.8mm)	G8	tee 2"x2"x1 1/2" (50.8mmx50.8mmx38.1mm)
G2	Tee 2" (50.8mm)	G9	Reducing Elbow 2"x1 1/2" (50.8mmx38.1mm)
G3	Plug 2" (50.8mm)	G10	Union 2" (50.8mm)
G4	Elbow 2" (50.8mm)	G11	45° ELBOW 2" (50.8mm)
G5	Pipe 1 1/2" (38.1mm)		

11 GALVANIZED PIPING SCHEDULE
Furnished & Installed by Piping Contractor

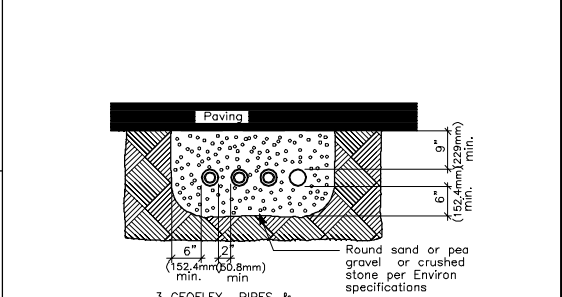

ExxonMobil
Fuel Marketing
A DIVISION OF EXXON MOBIL CORPORATION

U.S. Region
Engineering
EXXON MOBIL CORPORATION
ALL RIGHTS RESERVED

Project: Tank, Piping, Dispenser and Related Electrical Installation Drawings
Project No. 70010DP6
Date: 1/10/05
Issued For: Standard
Drawing No. P6.0