



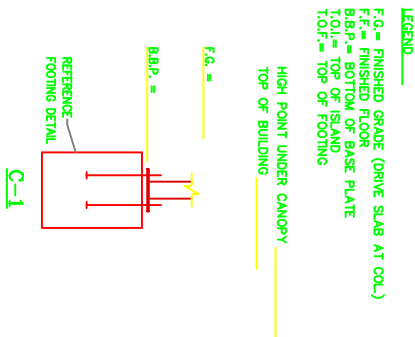

COLUMN NO.	FINISH GRADE	BOTTOM OF BASEPLATE
C-1	F.G. = 0"	B.B.P. =
C-2	F.G. = 0"	B.B.P. =
C-3	F.G. = 0"	B.B.P. =

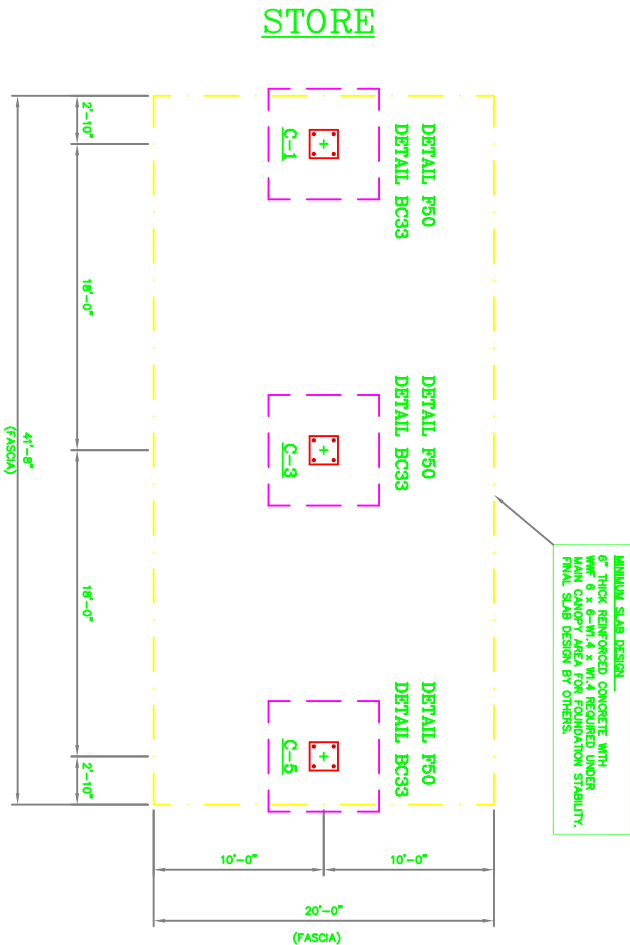

FOUNDATION PLAN

ALL DIAGONAL DIMENSIONS SHOWN ARE GIVEN TO CL OF COLUMN

LEGEND

B.B.P.= BOTTOM OF BASE PLATE
T.O.I.= TOP OF ISLAND
T.O.F.= TOP OF FOOTING

HIGH POINT UNDER CANOPY
TOP OF BUILDING

F.G. =

3.P. =

FOOTING

3


SITE CONDITIONS / REQUIREMENTS

ANCHOR BOLT NUT TIGHTENING PROCEDURE:

SET AND PLUMBER THE COLUMN, FITS ALSO, ERECTION PROVISIONS, WITH DOUBLE NUTS ON THE REQUIRED NUMBER OF ANCHOR BOLTS. THE BOTTOM NUT SHALL HAVE A FLAT WASHER BETWEEN THE BOTTOM OF BASEPLATE AND THE TOP OF THE NUT. THE TOP NUT SHALL HAVE A LOCK WASHER BETWEEN THE TOP OF BASEPLATE AND THE BOTTOM OF THE NUT. AFTER THE COLUMN IS SET AND PLUMBER, TIGHTEN THE TOP NUT TO A SUFFICIENT CONDITION WITH TOP OF THE COLUMN. SCORE THE ANCHOR BOLT THREED RIGHT ABOVE THE TOP NUT WITH A HAMMER OR OTHER DEVICE. THE SCORE SHALL BE SUCH THAT IT IS IMPOSSIBLE FOR THE TOP NUT TO BE UNTIGHTENED. AFTER THE COLUMN IS SET AND NUTS ARE FULLY TIGHTENED, THE G.C. SHALL COAT THE COLUMN, BASEPLATE, AND ANCHOR BOLTS BELOW FINISHED GRADE WITH ASPHALT BASED PAINT.

BASED PAINT

- 1.) PROVIDE A DRIVE ACCESSIBLE AREA TO WITHIN 15'-0" FROM THE EDGE OF CANOPY FASGA IN ORDER TO UNLOAD MATERIALS AND PERFORM WORK.
- 2.) FILL ALL OPEN TANK HOLES AND TRENCHES WITHIN 15'-0" FROM THE EDGE OF CANOPY FASGA FROM THE TIME THAT THE STRUCTURE ARRIVES AND UNTIL ERECTION IS COMPLETE.
- 3.) THE JOB SITE MUST BE GRADED LEVEL WITH NO SWELLS, DITCHES, OR TOPOGRAPHICAL IRREGULARITIES WITHIN 15'-0" FROM THE EDGE OF CANOPY FASGA. ANY CONCRETE POURED PRIOR TO MAGEE'S ARRIVAL MUST HAVE HAD AMPLE TIME TO CURE AND BE ABLE TO SUPPORT THE WEIGHT OF MAGEE'S TRAILERS AND CRANES.
- 4.) THE JOB SITE MUST BE DRY ENOUGH FOR MAGEE'S VEHICLES AND PERSONNEL TO PERFORM WORK. IF NECESSARY THE GENERAL CONTRACTOR SHOULD LAY GRAVEL IN EXCESSIVELY MUDDY AREAS TO ENSURE ADEQUATE WORK CONDITIONS.
- 5.) POURED CONCRETE PAVING UNDER THE CANOPY TO BE EXCLUSIVELY FOR WORK SPACE AND STORAGE OF MATERIALS.
- 6.) REMOVE ALL OVERHEAD OBSTRUCTIONS.
- 7.) FORM, SET, AND POURED FOUNDATIONS PER MAGEE'S SITE SPECIFIC APPROVED FOUNDATION PLAN. ALL FORMS SHALL BE REMOVED PRIOR TO MAGEE'S ARRIVAL. ALL THREADS SHALL BE FREE FROM DEBRIS AND DUST AND SHALL BE ACCESSIBLE.
- 8.) INSTALL ALL ANCHOR BOLTS W/ NUTS. SET AT PROPER ELEVATIONS WITH NO MORE THAN 1/4" TOLERANCE.
- 9.) PROVIDE TEMPORARY POWER SOURCE (110 VOLTS) WITHIN 100 FEET OF THE STRUCTURE FOR INSTALLERS USE.
- 10.) OBTAIN ALL REQUIRED PERMITS FROM LOCAL AUTHORITIES AND ARRANGE ALL LOCAL INSPECTIONS.
- 11.) VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS. ANY DEVIATIONS FROM THESE DRAWINGS DUE TO FIELD CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE PROJECT ENGINEER FOR MODIFICATIONS.

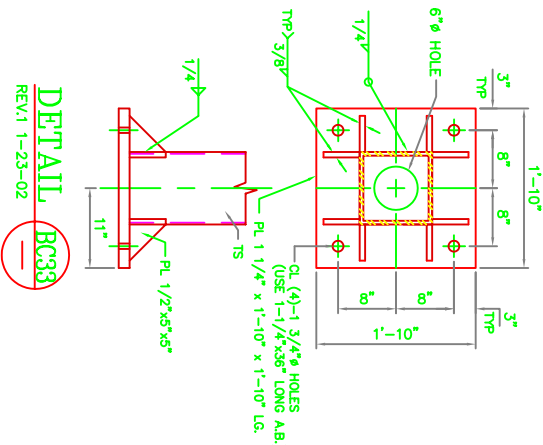

DETAIL BC33
REV.1 1-23-02 —

REV.1 1-23-02

PLEASE REVIEW ALL DRAWINGS, SIGN AND RETURN FOR FABRICATION OF CANOPY

- | <u>ENERGY SEC.</u> | ☒ APPROVED AS SUBMITTED |
|---------------------|--|
| | ☒ APPROVED WITH NOTED CHANGES |
| <u>GLASS SYSTEM</u> | ☒ APPROVED AS SUBMITTED |
| | ☒ APPROVED WITH NOTED CHANGES |
| <u>GLAZING</u> | ☒ APPROVED AS SUBMITTED |
| | ☒ APPROVED WITH NOTED CHANGES |
| <u>SEWER</u> | ☒ NUMBER APPROVED AS SUBMITTED |
| | ☒ LAYOUT APPROVED AS SUBMITTED |
| | ☒ APPROVED WITH NOTED CHANGES |
| <u>ROADS</u> | ☒ APPROVED AS SUBMITTED |
| | ☒ APPROVED WITH NOTED CHANGES |
| <u>LAND</u> | ☒ NUMBER APPROVED AS SUBMITTED |
| | ☒ LAYOUT APPROVED AS SUBMITTED |
| | ☒ APPROVED WITH NOTED CHANGES |


ELEVATION FORMS FORWARDED TO GENERAL CONTRACTOR ☐

APPROVED BY: _____

DATE: _____

NOTE: SIGNED SALES ORDER, APPROVAL DRAWINGS, AND A COMPLETED ELEVATION FORM MUST BE RECEIVED AT LEAST 3 WEEKS PRIOR TO DELIVERY OF ANY CANOPY MATERIALS.

REQUESTED DELIVERY DATE: _____

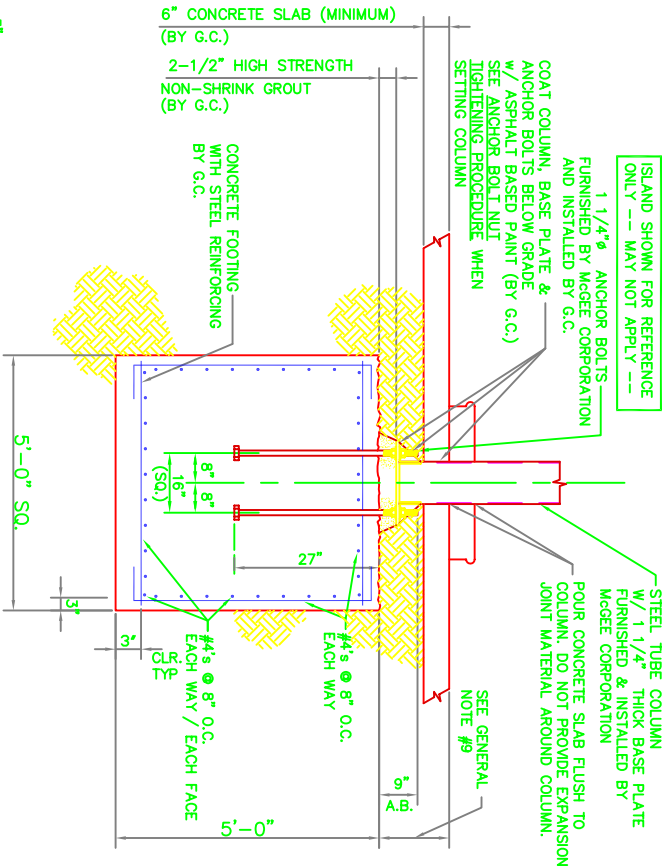

DETAIL F1

REV. 01-24-01

NOTE: FOUNDATIONS SHALL ONLY BE BACKFILLED WITH PROPERLY COMPACTED EXISTING RESIDUAL SOILS OR NEWLY PLACED STRUCTURAL FILL. SOILS USED IN COMPACTED FILLS SHALL BE FREE OF DEBRIS AND HAVE LESS THAN 5% BY WEIGHT FIBROUS ORGANIC MATERIAL.

GENERAL NOTES:

Larry R. Brock, Jr., S.E., P.E.

Engineering Services

Telephone (704) 882-1500
Facsimile (704) 882-3263
3108 Shady Grove Lane
Matthews, NC 28104

McGEE CORPORATION	
12725 W. 12th Avenue Bldg. P.O. Box 1375 Denver, CO 80202-0137 Phone: (303) 526-3589 Telex: (303) 526-3589	
These prices are the factory prices of the Com- pact. Dealer's price may vary. Not to be used without written permission.	
REG. COB. NO.	FINAL COB. NO.
	29725
EXXONMOBIL CORP. 1-294 AND DENNY RD./O'HARE WEST SCHILLER, IL (COOK COUNTY)	
GRADE 37/48-0	IN ACCORDANCE WITH REG. LETTER _____
DATE 5/17/83	ISSUED BY KILA CITY OF KILA
CANOPY "B" 20'-0 x 41'-8	
FOUNDATION PLAN	
SHEET NO. 1	OF 3

TEST

DESIGN BY:	KIA
CHKD BY:	KIA

8

SHEET NO.	1 of 3
-----------	--------