




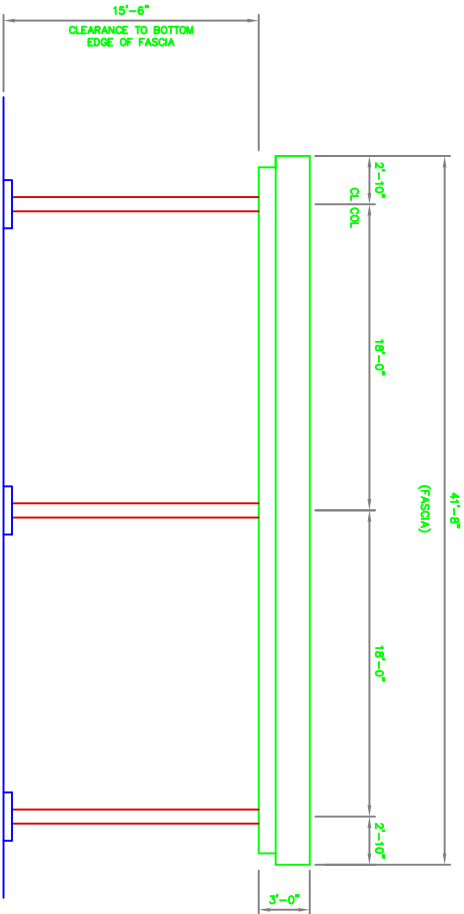


FRONT ELEVATION

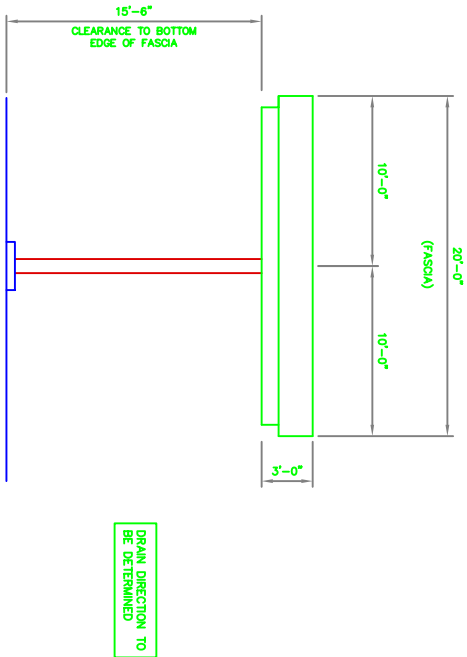


END ELEVATION

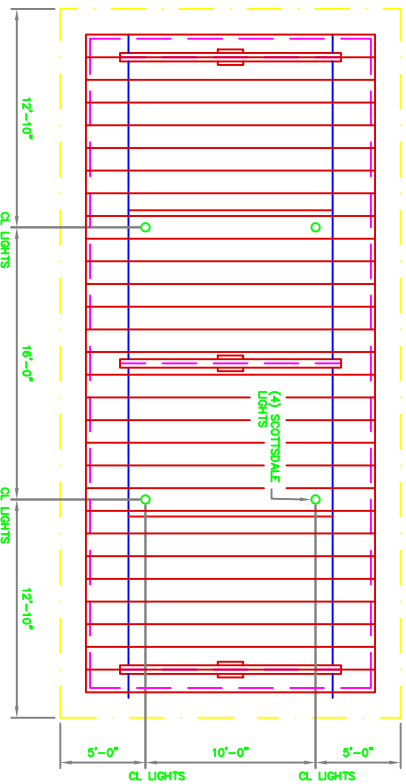

LIGHT LAYOUT

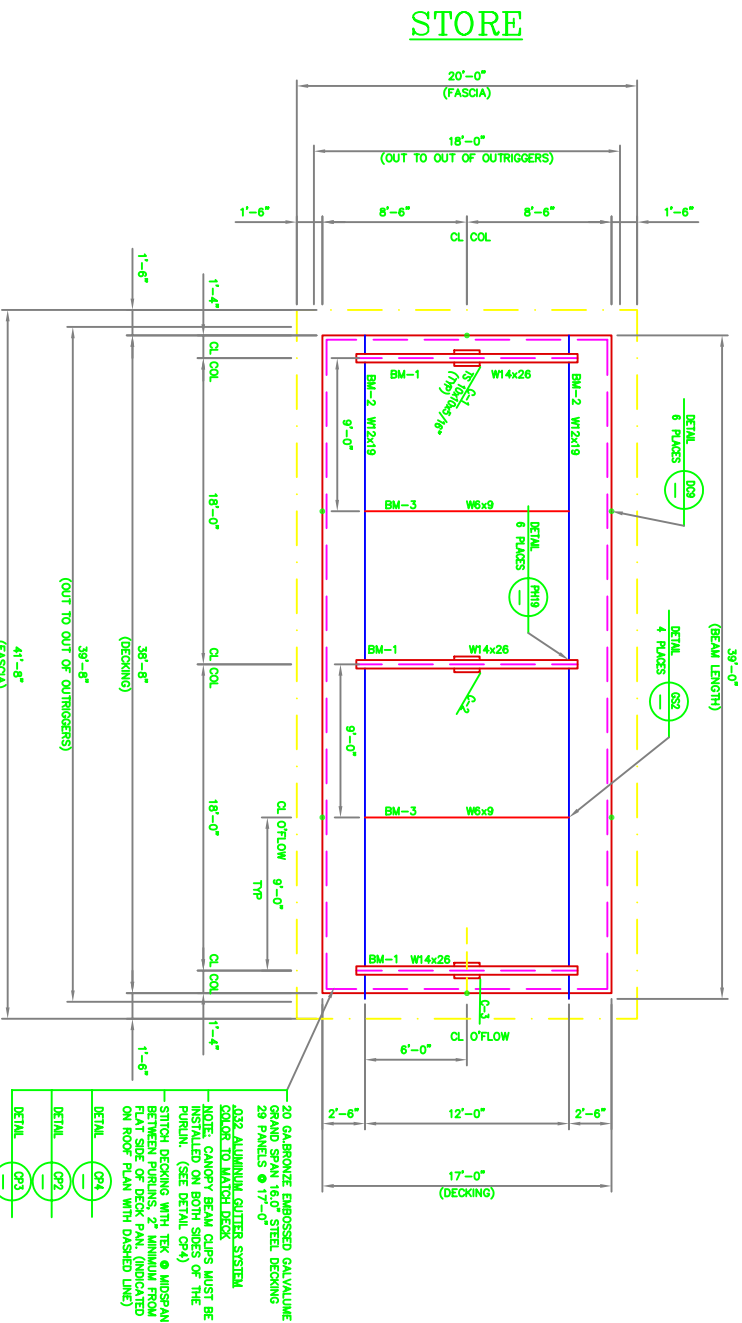

CANOPY ROOF PLAN

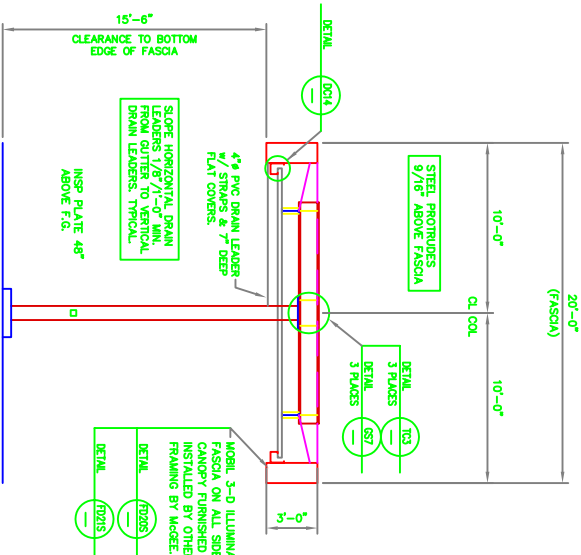

MAIN FRAME DETAIL

CANOPY TO HAVE .BELOW. GROUND DRAINAGE SYSTEM WITH 4/2" PVC INTERNAL DRAINS. SEE ROOF PLAN FOR DIRECTIONS.

ANCHOR BOLT SHIPPING REQUIREMENTS						
ANCHOR BOLT USE		BOLT DESCRIPTION			QUANTITY	
CANOPY		1-1/4" x 36" LONG HEADED BOLTS			12	
HARDWARE LIST BREAK-DOWN (REFERENCE ONLY)						
ITEM USE (# OF PLACES FOR CHECKING ONLY)		DESCRIPTION			QUANTITY	
TOS-TOP PLATE (3 PLACES)		5/8" x 2-1/2" BOLTS w/ NUTS & WASHERS			24	
PHI9-CONNECTION (6 PLACES)		5/8" x 2-1/2" BOLTS w/ NUTS & WASHERS			24	
GSE-CONNECTION (4 PLACES)		5/8" x 2-1/2" BOLTS w/ NUTS & WASHERS			16	
CANOPY SHIPPING STEEL HARDWARE MANIFEST						
QUANTITY	DESCRIPTION	QUANTITY SHIPPED	PULLED BY	CHECKED BY	TRAILER #	LOADED BY
64	5/8" x 2-1/2" BOLTS w/ NUTS & WASHERS					
CANOPY SHIPPING MANIFEST						
3	BM-1 W4x26 (13'-0")		TOP PLATE			
2	BM-2 W2x19 (39'-4")					
2	BM-3 W6x9 (11'-11 5/8")					
3	COL 1.2,3, TS 10x10x6/16"					
24	SIDE OUTRIGGERS @ 48" O.C.					
12	END OUTRIGGERS @ 48" O.C.					
1-LOT HARDWARE						

Larry R. Brock, Jr., S.E., P.E.
Engineering Services
Telephone (704) 882-1500 3108 Shady Grove Lane
Facsimile (704) 882-3263 Matthews, NC 28104

McGEE CORPORATION		PC JOB NO.	29725	PC JOB NO.	29725
EXXONMOBIL CORP.		DATE	3/16/03	DATE	3/16/03
1-294 AND DENTY RD/O'HARE WEST		SCALE	3/16=1'-0"	SCALE	3/16=1'-0"
SCHILLER, IL (COOK COUNTY)		IN ACCORDANCE	WITH REV. LETTER	IN ACCORDANCE	WITH REV. LETTER
CANOPY "B" 20'-0 x 41'-8		DATE	3/17/03	DATE	3/17/03
ROOF PLAN & DETAILS		DESIGNED BY	KLA	DESIGNED BY	KLA
		CHECKED BY	KLA	CHECKED BY	KLA
		DATE	3/17/03	DATE	3/17/03