

WebAIM Short Form TASK GROUP INSTRUCTION

04-MAR-2025 1442

20.14.15.2.9020 (September 2024)

ICN: 3819P22114 KeyOp: A17

TGI NO:	COMPONENT NAME: 1A BOILER	TYPE: BO	PHASE: A	REPEAT: 11	CHG/VER: 0/0
SHIP/HULL NO: LCC-19	SHIP/HULL NAME: USS BLUE RIDGE	PROJECT: 19P	SYSTEM: 22111	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *(BIRMIS) F/O - INSPECT AND REPAIR SIDE WALL SLIDING FEET AND CASING 1A BOILER					
PREPARING ACTIVITY:		STATUS: APP		WORKING STATUS:	
PREPARED BY: IZUMI, NORIAKI		CODE: 234		PHONE: 3152432243	
APPROVED BY: HARADA, HIDEO		CODE: 234		PHONE: 3152435176	
CONCURRED BY:		CODE:		PHONE:	
REASON FOR WORK/NEED FOR CHANGE: EM02L194					
JCN: EM02-L194					
SPECIAL REQUIREMENTS: TGI Short Form					
CU PHASE DESCRIPTION: 1. SCOPE/PURPOSE: 1.1 Title: 1A Boiler Side Wall Header Sliding Feet and Outer Casing Bolted Joint Gasket; inspect and repair 1.2 Location of Work: 1.2.1 Fire Room (8-76-0-E) 1.3 Identification: 1.3.1 Quantity (One Lot), Casing, Around Front and Rear Foundation, Side Wall, 1A boiler 1.3.2 Quantity (2 EA), Sliding Feet, Sidewall Header, 1A Boiler Foundation Material: Steel, MIL-S-22698 Remarks: see Sketch Enclosure-02 for details of sheet metal pan 1.3.2.1 Quantity (8 EA), Fastener					
ZONE MANAGER: KANKE, KOUHEI		ZONE:	COMPARTMENT: 8-76-0-E	LEVEL:	FRAME:
JOB SUMMARY ID: 221A1114		TOT MAN HR.:	TOT DUR:	TOT JML COST:	PLANNING ACCEPTANCE:

WORK CERTIFICATION SIGNATURES:	DLs																
COMPLETION OF WORK REVIEW:				BADGE NO:		SHOP/CODE:		PHONE:		DATE:							
RECORDS REVIEW:				BADGE NO:		SHOP/CODE:		PHONE:		DATE:							



WebAIM Short Form TASK GROUP INSTRUCTION

04-MAR-2025 1442

20.14.15.2.9020 (September 2024)

(Continued)

ICN: 3819P22114

KeyOp: A17

TGI NO:	COMPONENT NAME: 1A BOILER	TYPE: BO	PHASE: A	REPEAT: 11	CHG/VER: 0/0
SHIP/HULL NO: LCC-19	SHIP/HULL NAME: USS BLUE RIDGE	PROJECT: 19P	SYSTEM: 22111	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *(BIRMIS) F/O - INSPECT AND REPAIR SIDE WALL SLIDING FEET AND CASING 1A BOILER					

CU PHASE DESCRIPTION (Cont.)

Bolt: Heavy HEX Head, 2-1/2-8UN-2A X 8-1/2 LG, CHROME MOLY Steel , ASTM A193, GR B7

Nut: JAM Heavy HEX Head, 2-1/2-8UN-2B, ALLOY Steel, ASTM A194, GR 4

Washer: Steel, 5" OD X 2-5/8 ID X 0.28 Inch Thickness Max, FF-W-92, GR 1, CL A, TY A

1.3.2.2 Quantity (2 EA), Injection Fitting

Material: 1/8 IPS Thread Fitting, MIL-F-3541 TY 3

1.4 Security Classification: None.

1.5 Initial Condition:

1.5.1 Potential Lead Control

1.6 Contractor Start Date: 7/21/2026

1.7 Contractor Work Completion Date: 11/21/2027

2. PROCEDURE:

2.1 Accomplish a visual inspection of the current ship condition to identify and designate each area requiring repair of interior and exterior of each casing listed in 1.3.1, using Enclosure-01 for guidance.

2.1.1 Submit one legible copy, in hard copy or approved transferrable media, of a report listing results of the requirement of 2.1 to the SUPERVISOR.

2.2 Accomplish solvent cleaning for front and rear side of the sliding feet listed in 1.3.2 accordance with Ref. No. 3.

2.2.1 Fabricate and install each sheet metal pan around sliding feet for solvent cleaning.

2.2.1.1 Accomplish the requirements of 009-12 of Ref. No. One, including Table 2, Column(s) A and D, Lines One through 7.

2.2.1.2 Template exact size, configuration, and location from existing shipboard conditions.

2.2.2 Fill the metal pan with solvent, and allow it to stand from several days.

2.2.3 Darin the solvent and remove each sheet metal pan installed after completion of the solvent cleaning.

2.3 Remove existing and install each new fastener listed in 1.3.2.1 in accordance with Ref. No. 4.

2.3.1 Accomplish the requirements of 009-12 of Ref. No. One, including Table 2, Column(s) A, Lines One through 7.

2.4 Install each new injection fitting listed in 1.3.2.2 in accordance with Ref. No. 4.

2.4.1 Chase and tap each exposed threaded area.

2.5 Accomplish the requirements of 009-32 of Ref. No. One for each new and disturbed surface.

2.6 Notes:

WebAIM Short Form TASK GROUP INSTRUCTION

04-MAR-2025 1442

20.14.15.2.9020 (September 2024)

(Continued)

ICN: 3819P22114

KeyOp: A17

TGI NO:	COMPONENT NAME: 1A BOILER	TYPE: BO	PHASE: A	REPEAT: 11	CHG/VER: 0/0
SHIP/HULL NO: LCC-19	SHIP/HULL NAME: USS BLUE RIDGE	PROJECT: 19P	SYSTEM: 22111	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *(BIRMIS) F/O - INSPECT AND REPAIR SIDE WALL SLIDING FEET AND CASING 1A BOILER					

CU PHASE DESCRIPTION (Cont.)

2.6.1 Planner: Code 234 N. Izumi, 243-2243

2.6.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-5419-0598

2.6.3 Lubrication and demonstration for injection of new grease into sliding feet will be accomplished by Ship's Force post this repair work.

2.6.4 This TGI is response to Boiler Inspection and Repair Management Information System (BIRMIS) for 1A Boiler report dated 17 OCT 2024, Line item "E11-01 and E2-01".

2.6.5 JCN EM02-L194 is related to this TGI.

2.7 Government Furnished Material (GFM):

2.7.1 SRF-JRMC will provide GFM listed in the Material List.

2.8 SRF-JRMC will provide the following service work: (TGI No: 3819P22114S17)

2.8.1 [C740] Crane and crane rigging service.

2.8.2 [X99E] Provide utility service, electrical.

2.8.3 [X99M] Provide utility service, including low pressure air supply, water supply, and steam supply.

2.8.4 [C106.1] Provide safety inspection for SRF-JRMC employees.

2.8.5 [C106.2] Provide gas free inspection for SRF-JRMC employees.

2.8.6 [C133] Provide QA inspection for (G) symbols.

WebAIM Short Form TASK GROUP INSTRUCTION

04-MAR-2025 1442

20.14.15.2.9020 (September 2024)

(Continued)

ICN: 3819P22114

KeyOp: A17

TGI NO:	COMPONENT NAME: 1A BOILER	TYPE: BO	PHASE: A	REPEAT: 11	CHG/VER: 0/0
SHIP/HULL NO: LCC-19	SHIP/HULL NAME: USS BLUE RIDGE	PROJECT: 19P	SYSTEM: 22111	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *(BIRMIS) F/O - INSPECT AND REPAIR SIDE WALL SLIDING FEET AND CASING 1A BOILER					

OTHER SPECIAL REQUIREMENTS:

,

Ref. No.	Document/Drawing Number	DOCUMENT/DRAWING TITLE	REV	CHG NO.	CPY REQ	PARAGRAPH	SECT	PG	CHPT
1	NSI FY-25	NAVSEA Standard Items	-	ORG	N				
2	LI FY-25	Local Standard Items	-	ORG	N				
3	TM S9086-GY-STM-010/CH-221	Boilers	8		N				
4	DWG 803-2145500	CHOCK FOR BOILER FOUNDATION ACCETABLE METHOD OF FITTING	E		Y			ALL	

TASK NAME / TASK DESCRIPTION	SHOP/ TSD	TS	SF WC	CREW #	MHRS	RWRK
2.1 BLRM HRs	22/KE	PC				N
2.2 BLRM HRs, WELD HRs, QA HRs	22/KE	PC				N
2.3 BLRM HRs, WELD HRs, QA HRs	22/KE	PC				N
2.4 BLRM HRs	22/KE	PC				N
2.5 PNTR HRs, QA HRs	22/KE	PC				N
Boiler Work CFM for Marine Chemist cost, firewatch cost, Lead, Grinding Abrasive, gas and welding rod, paint and other consumable material (MISC).	22/MQ	CS				N
Process Funding Document	10/CT	OM				N

MATERIAL REFERENCES			
REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV
1	245500		

ICN: 3819P22114	KEY OP: A17
-----------------	-------------

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	HAZ	QAMAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT

WebAIM Short Form TASK GROUP INSTRUCTION

04-MAR-2025 1442

20.14.15.2.9020 (September 2024)

(Continued)

ICN: 3819P22114

KeyOp: A17

TGI NO:	COMPONENT NAME: 1A BOILER	TYPE: BO	PHASE: A	REPEAT: 11	CHG/VER: 0/0
SHIP/HULL NO: LCC-19	SHIP/HULL NAME: USS BLUE RIDGE	PROJECT: 19P	SYSTEM: 22111	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *(BIRMIS) F/O - INSPECT AND REPAIR SIDE WALL SLIDING FEET AND CASING 1A BOILER					

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
001	4	1	M	BOLT, HEAVY HEX HEAD, BOLT, HEAVY HEXAGON HEAD, 2-1/2"-8UNC-2A X 8-1/2" LENGTH, MATERIAL: CHROMIUM MOLYBDENUM VANADIUM, SPEC: ASTM A193 GRADE B7, ASME-B18.2.1. DWG: 803-2145500, PC.4, C234 N. IZUMI, 243-2243 ORDERED FOR KTR	9B 5306 LL9310715		NA	4	N		10/EA	
002			M	NUT, JAM, HEAVY HEX, JAM NUT, HEAVY HEXAGON HEAD, 2-1/2"-8UNC-2B, MATERIAL: ALLOY STEEL, ASTM A194, GRADE 4. ASME B18.2.2 USE FOR BOLT, HEAVY HEXAGON HEAD, 2-1/2"-8UNC-2A X 8-1/2"LENGTH, CHROMIUM MOLYBDENUM VANADIUM ASTM A193, GRADE B7, ASME-B18.2.1. C234 N. IZUMI, 243-2243 ORDER FOR KTR	9B 5310 LL9310714		NA	4	N		10/EA	
003			M	WASHER,FLAT, C234 N.IZUMI, 243-2243 ORDER FOR KTR WASHER, STEEL, FF-W-92 GR 1, CL A, TY A DWG: 2145500 PC NO. 6	9B 5310 009960138		NA	4	N	50595312	20/EA	
004			M	SHIM, 0.006 THK, SHIM, 0.006 THK (SST) (ASTM A-167) USING FOR SLIDING FEET FASTENERS C234 N. IZUMI, 243-2243 ORDER FOR KTR	9B 5365 LL9008056		NA	4	N		10/EA	
005			M	CLEANING COMPOUND,S, C234 N. IZUMI, 243-2243 ORDER FOR KTR SOLVENT "140F" FEDERAL SPECIFICATION P-D-680, TYPE II	9B 6850 002745421		NA	4	Y	50595315	6/CN	
006			M	GREASE,SILICONE INS, C234 N. IZUMI, 243-2243 ORDER FOR KTR SILICON GREASE (HIGH TEMPERATURE) 14-OZ CARTRIDGE	9B 9150 010809652		NA	4	Y	50595318	10/CA	
007			M	SHEET,METAL, CRES 316L, 4' X 8' X 1/8" THK ORDER FOR KTR ORIG: C234 N. IZUMI, 243-2243 USING FOR FAB PAN	9B 9515 002044595		NA	4	N	50595320	1/SH	

WebAIM Short Form TASK GROUP INSTRUCTION

04-MAR-2025 1442

20.14.15.2.9020 (September 2024)

(Continued)

ICN: 3819P22114

KeyOp: A17

TGI NO:	COMPONENT NAME: 1A BOILER	TYPE: BO	PHASE: A	REPEAT: 11	CHG/VER: 0/0
SHIP/HULL NO: LCC-19	SHIP/HULL NAME: USS BLUE RIDGE	PROJECT: 19P	SYSTEM: 22111	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *(BIRMIS) F/O - INSPECT AND REPAIR SIDE WALL SLIDING FEET AND CASING 1A BOILER					

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
008			M	PLATE,METAL, C234 N. IZUMI, 243-2243 4 X 8 ORDERED FOR 41B	9B 9515 002044622		NA	4	N	50595353	32/SF	
009			M	RUBBER SHEET,SOLID,, RUBBER GASKET, UNAFLEX, TYPE 96, THK 1/8" OEDERED FOR KTR, ORG: C234 N. IZUMI, 243-2243 USING FOR FAB PAN	9B 5330 014905014		NA	4	N	50595322	1/RO	
010			M	FITTING,LUBRICATION, C234 N.IZUMI, 243-2243 ORDER FOR KTR LUBRICATION FITTING, 1/8 IPS, 65 DEGREES, MIL-F-3541 TY 3, USING FOR INJECTION FITTING OF SLIDING FEET	9B 4730 001720031		NA	4	N	50595324	1/PG	
011			M	TUBE,METALLIC, C234 N. IZUMI, 243-2243 TUBGING 3/8 OD, 0.035" WALL THKS, CRES304, MIL-T-8506, ORDER FOR KTR	9B 4710 009753819		NA	4	N	50595325	5/FT	
012			M	TUBE, TUBE, METAL, SIZE; 1/4"OD X 0.049"THK, MATL: CRES 316, ASTM-A269 GR TP316, SEAMLESS 5FT / 1EA RQRD. C234 N. IZUMI, 243-2243 ORDER FOR KTR	9B 4710 LL9307315		NA	4	N		5/FT	
013			M	UNION,PIPE, ORDER FOR KTR ORIG: C234 N. IZUMI	9B 4730 008397477		NA	4	N	50595326	10/EA	
014			M	ADAPTER,STRAIGHT, MALE CONNECTOR, FLARELESS X NPTF, SPEC: MIL-DTL-18866, TUBE SIZE: 3/8" OD, THREAD SIZE: 1/8" NPT-27, MATL: STAINLESS STEEL, PRESSURE CLASS: 6000 PSI, NSN: 4730-01-219-7749(SMIC: X3), ORDER FOR KTR ORIG: C234 N. IZUMI	9B 4730 LL9310712		NA	4	N		10/EA	
015			M	ELBOW,PIPE TO TUBE, ORDER FOR KTR ORIG: C234, N. IZUMI	9B 4730 001764511		NA	4	N	50595327	10/EA	
016			M	NIPPLE,TUBE, ORDER FOR KTR ORIG: C234, N. IZUMI	9B 4730 008716937		NA	4	N	50595328	10/EA	

WebAIM Short Form TASK GROUP INSTRUCTION

04-MAR-2025 1442

20.14.15.2.9020 (September 2024)

(Continued)

ICN: 3819P22114


KeyOp: A17

TGI NO:	COMPONENT NAME: 1A BOILER	TYPE: BO	PHASE: A	REPEAT: 11	CHG/VER: 0/0
SHIP/HULL NO: LCC-19	SHIP/HULL NAME: USS BLUE RIDGE	PROJECT: 19P	SYSTEM: 22111	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *(BIRMIS) F/O - INSPECT AND REPAIR SIDE WALL SLIDING FEET AND CASING 1A BOILER					


MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
017			M	PLATE,METAL, C234 N. IZUMI ORDER FOR KTR PLATE,METAL, 7FTX10FT X 1/4 THK	9B 9515 009526280		NA	4	N	50595329	1/PM	
018			M	PLATE,METAL, PLATE, 3/8 THK,, C-STL, ASTM A36, ORIG: C234	9B 9515 009173655		NA	4	N	50595330	1/PM	
019			M	PLATE,METAL, ORIG: C234 N. IZUMI ORDER FOR KTR PLATE, 1/2 THK, C-STL, ASTM A36,	9B 9515 009695124		NA	4	N	50595331	1/PM	
020			M	BOLT,MACHINE, C234 N.IZUMI, 243-2243 ORDER FOR KTR SCREW, HEX CAP, 5/8-11UNC X 1" LG, ALLOY STL, MIL-DTL-1222, TY I, GR 5	9B 5306 002270547		NA	4	N	50595352	50/EA	
021			M	SCREW,CAP,HEXAGON H, C234 N.IZUMI 243-2243 ORDER FOR KTR MATERIAL: 5/8" X 1-1/4", GR5	9B 5305 012001432		NA	4	N	50595332	50/EA	
022			M	SCREW,CA, SIZE: 5/8"-11, 1-1/2"L, MTL: STL ORDERED FOR KTR ORIG: C234 N. IZUMI	9B 5305 007245910		NA	4	N	50595313	50/EA	
023			M	WASHER,FLAT, ORIG: 234 N. IZUMI ORDERED FOR KTR	9B 5310 009517209		NA	4	N	50595314	1/HD	
024			M	WASHER,FLAT, ORIG: C234 N. IZUMI ORDER FOR KTR	9B 5310 014282155		NA	4	N	50595333	100/EA	

ATTACHMENT LIST

TITLE	FILE NAME	SAVED DATE
ENCLOSURE-01	3819P22114A17-Sketch-01.pdf	28-FEB-2025 0000
ENCLOSURE-02	3819P22114A17-Sketch-02.pdf	28-FEB-2025 0000

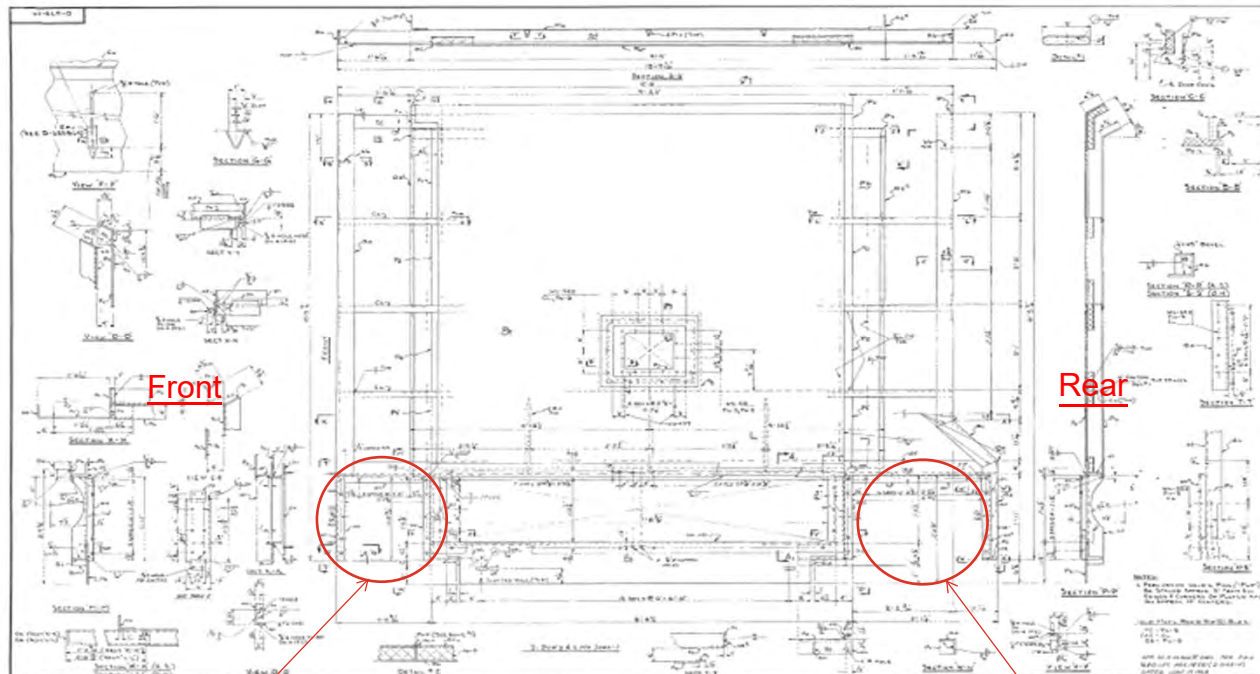

SKETCH
ENCLOSURE-01

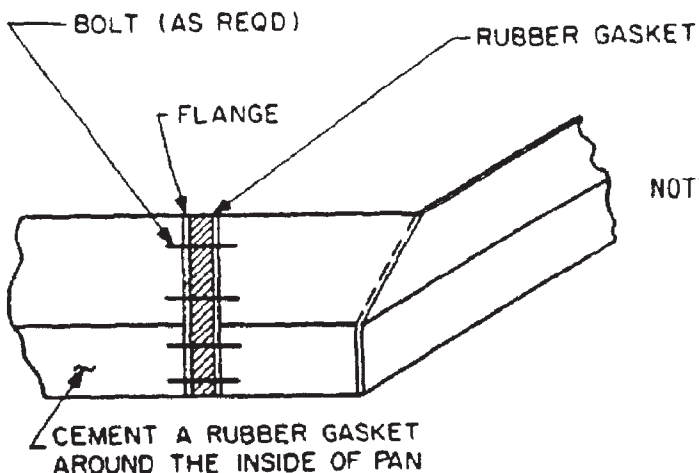

NOTE 1: SEALANT SHOULD BE RESISTANT TO SOLVENT AND EASILY SCRAPED OR CHIPPED AWAY. CERTAIN EPOXY CEMENTS MAY BE SUITABLE FOR THIS PURPOSE. ALLOW SEALANT TO DRY/CURE BEFORE INTRODUCING SOLVENT.

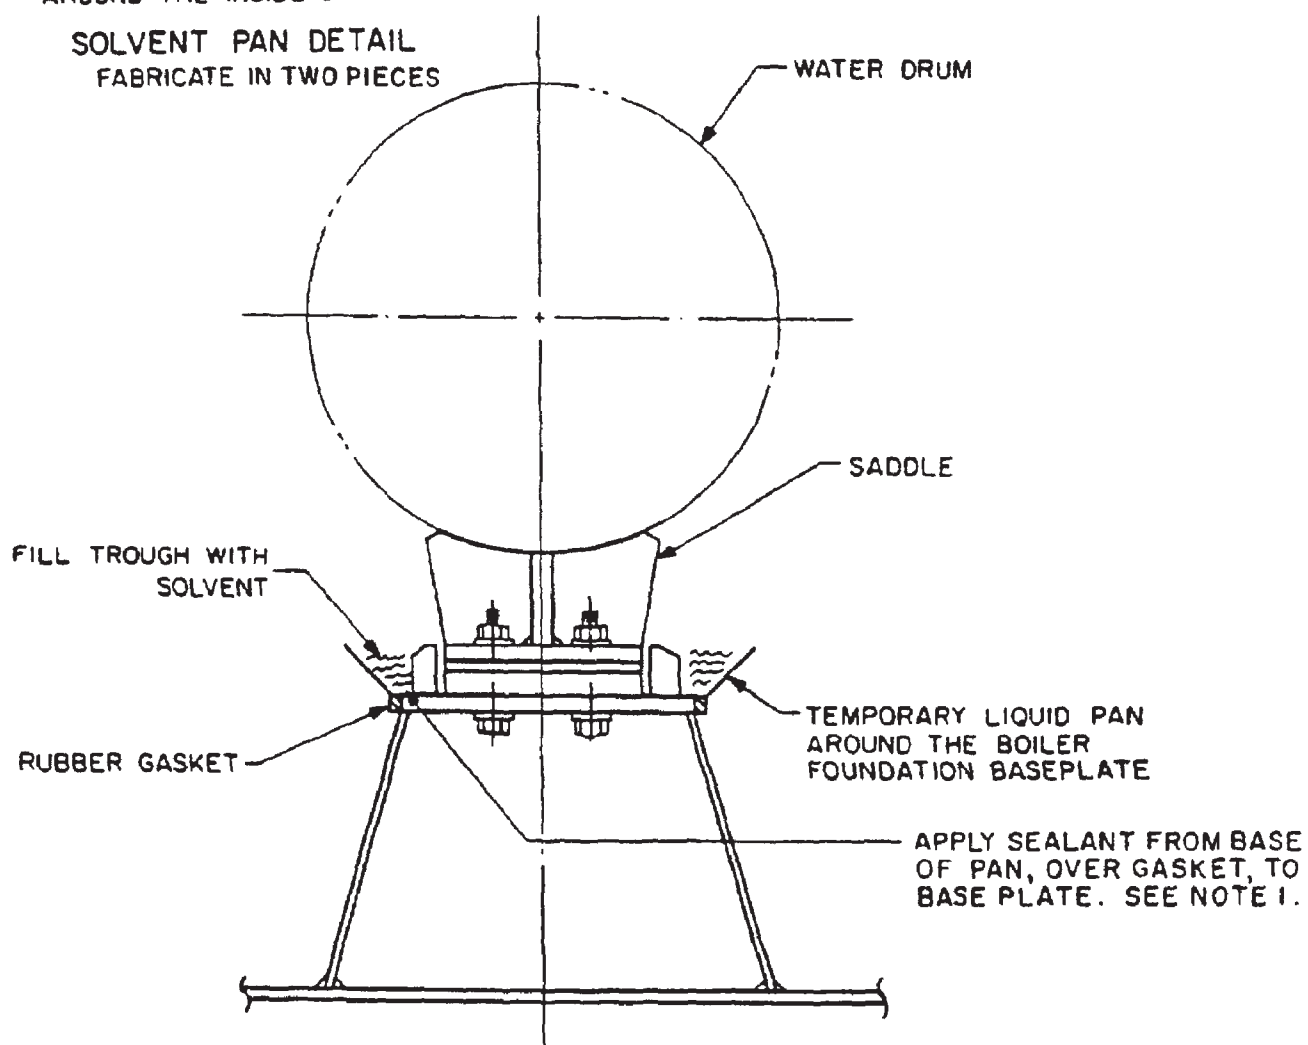


Figure 12-4. Typical Pan Installation for Solvent Soak